

| | | | |
|------|-------|----|--|
| Cv3f | | | |
| | (3) | Tn | |

Jaymart

PRIALPAS - RUBBER FLOORCOVERING



HAVE IT ALL YOUR OWN WAY...

Jaymart

Jaymart are delighted to introduce a new range of outstanding rubber floorings manufactured by Prialpas, one of the world's leading rubber processing and development companies.

Rubber flooring is already one of the world's most popular hard-surface flooring types for a wide variety of situations, but this range of both rolls and tiles, benefiting from all Prialpas' 50 years of experience in the processing and treatment of rubber, is set to take it to a new level.

Each product in Jaymart's new Prialpas rubber flooring range is environmentally friendly, high performance, incredibly inexpensive both to install and maintain, and comes in a variety of colours and finishes that interior designers have previously only been able to dream of.

So, whatever your requirements, with Jaymart's new range of Prialpas rubber floorings you really can now have it all!

Resistance is critical

With any flooring choice, safety has to be the single most important consideration, but Prialpas rubber floorings have been developed with high traffic areas in mind, where safety is simply critical.



Jaymart's range of Prialpas rubber floorings are incredibly durable, offering: slip-resistance, electrical-resistance, chemical-resistance, abrasion-resistance, fire-resistance, and cigarette burn-resistance; and for any area with intense levels of either pedestrian or rolling traffic, where noise reduction and comfort are absolute necessities, you can be quietly confident that Jaymart's Prialpas rubber floorings are the sound choice.

Now, that is comforting

Whatever your budget, their incredible accuracy and consistency of manufacture means that Prialpas rubber floorings are extremely inexpensive to purchase, easy and economical to install, and extraordinarily low maintenance.

So, if you're looking for the sort of inexpensive, high performance, safe, low maintenance rubber flooring with fabulous walking comfort you simply didn't believe existed, with Jaymart's Prialpas you'll feel like you're walking on air!

FOR MORE INFORMATION ON ANY ASPECT OF PRIALPAS RUBBER FLOORING, PLEASE CALL JAYMART ON 01373 864926

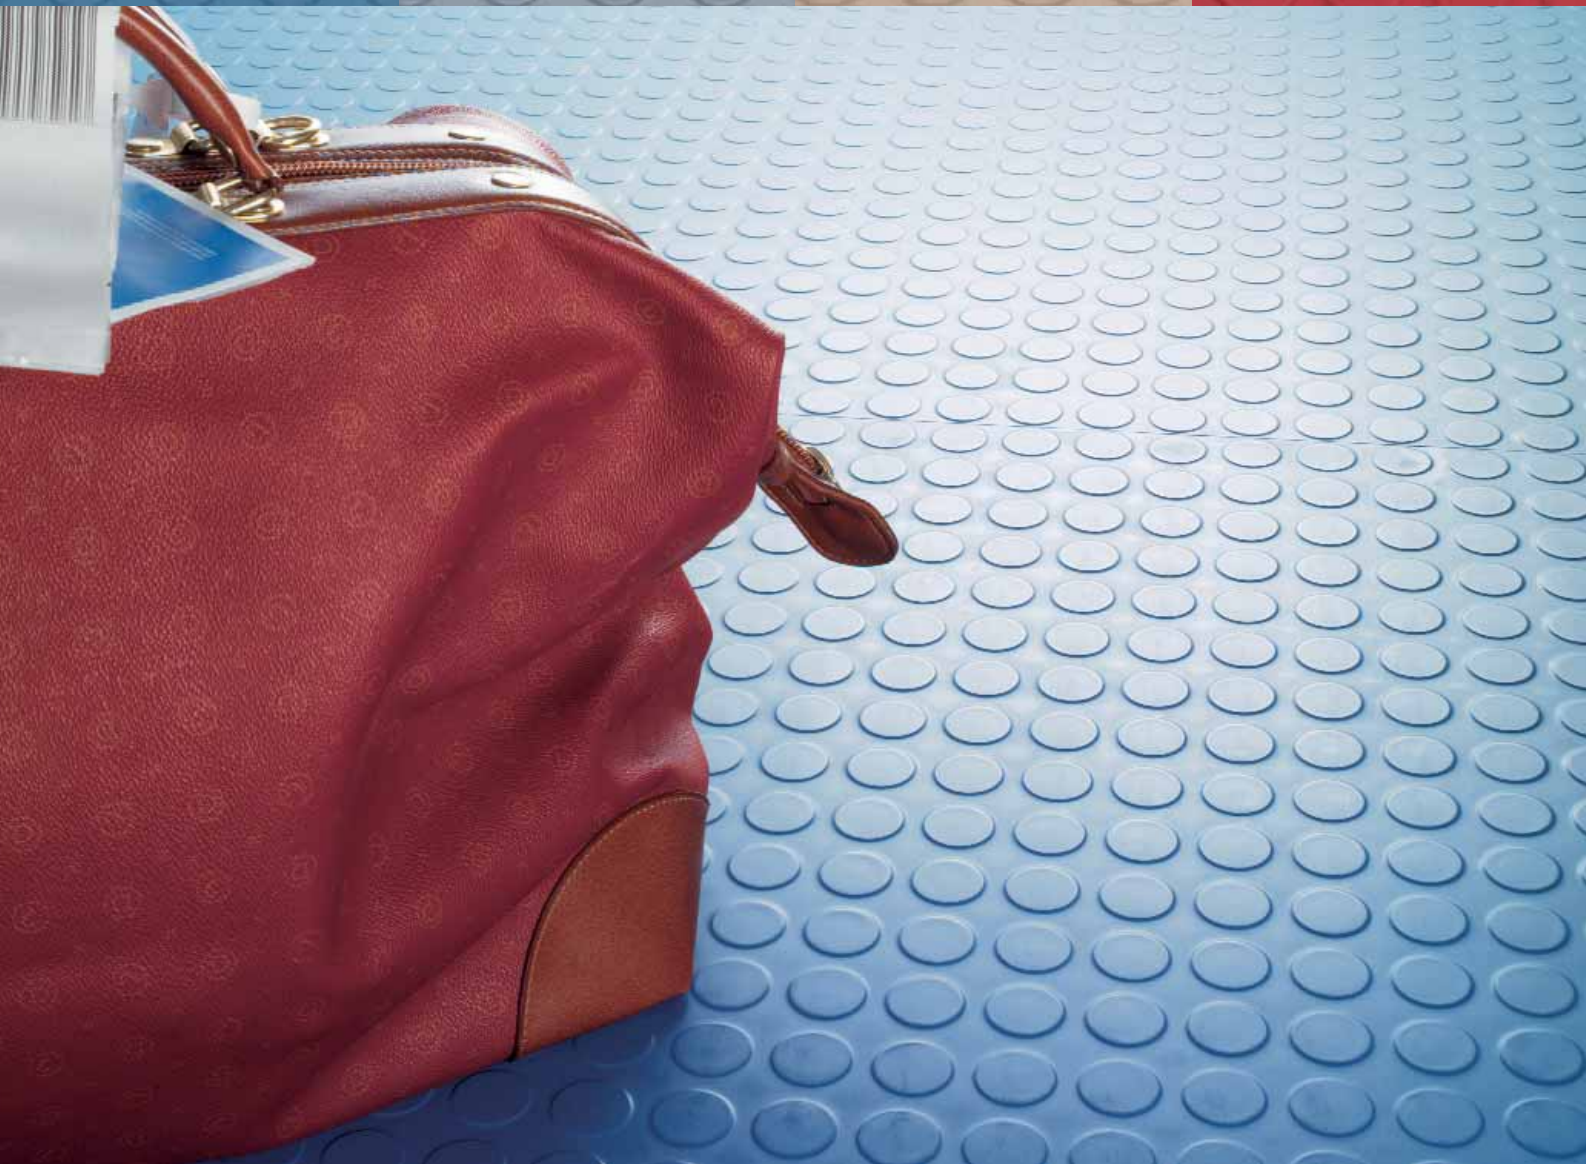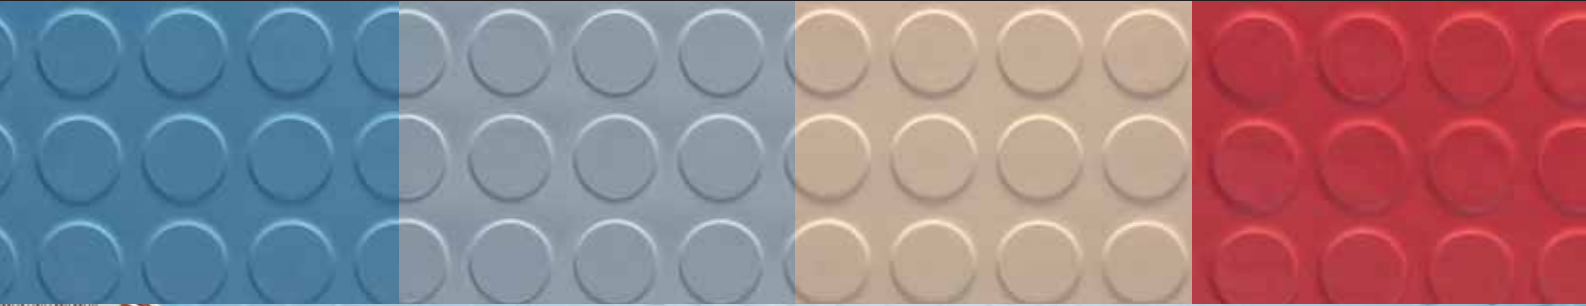


PRIALPAS CENTRAL

CENTRAL super contract quality round studded pastille rubber safety flooring represents remarkable value for money. Unlike some competitive floorings, Central tiles are accurately square, of consistent overall thickness, and easy to install and maintain. Central is ideal for intense pedestrian traffic areas, where sound absorption, walking comfort and easy maintenance are essential requirements. Prialpas Central rubber floorings assure outstanding durability and resistance to cigarette burns.

Applications: football stadia, public buildings, hospitals, cinemas, schools, hotels, offices, banks, dept stores & airports etc.


Thickness: 2.6mm or 4.0mm.

Stud diameter: 30mm. Stud height: 0.5mm. Tile Size: 500mm x 500mm.

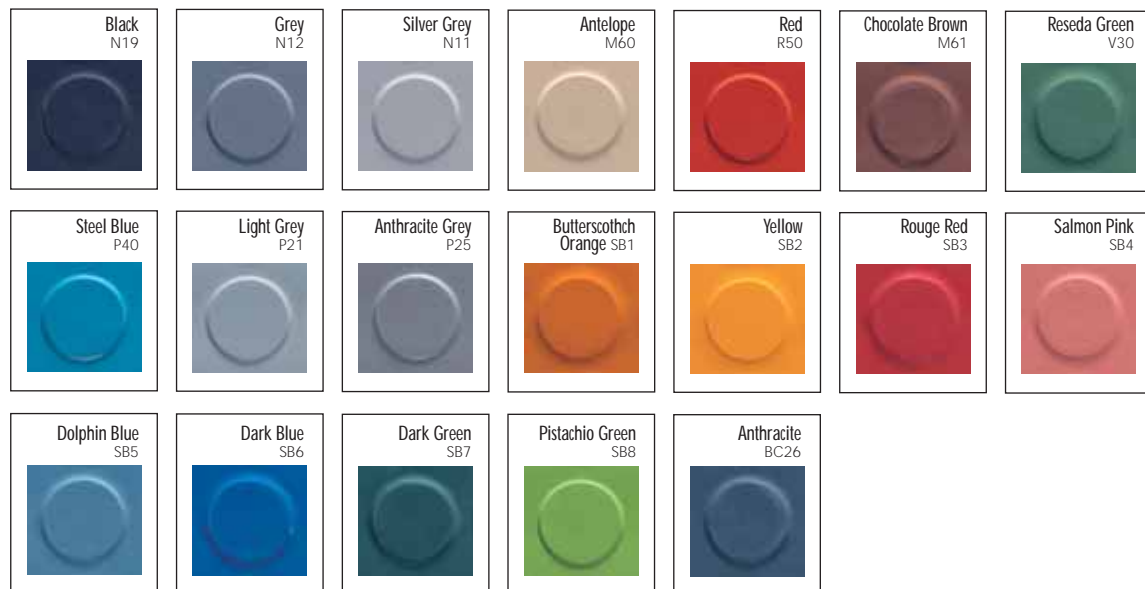

Oil Resistant Quality also available. Normally stocked in Black. Other colours available subject to minimum 200m² orders.

Thickness: 4.0mm

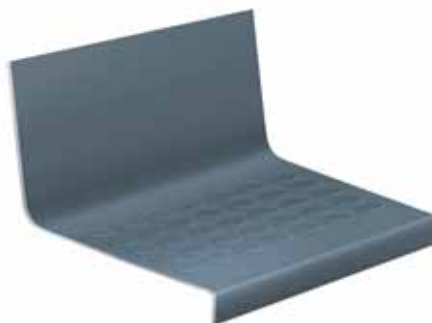

A matching combined tread/nosing/riser section is available in all of the standard Central colours.

Total thickness: 4.0mm

Thickness of preformed angle: 6.0mm

Unit size: 1300mm X 550mm



PRIALPAS CONFORT HAMMER



CONFORT HAMMER Uni-coloured hammerblow structure synthetic rubber safety flooring tiles. Confort Hammer is an attractive, one-coloured, extra resilient, slip resistant rubber flooring, offering proven extraordinary abrasion resistance, sound absorbency, simple cost-effective maintenance, cigarette burn resistance, good flame resistance, good rolling traffic capacity, dirt resistance and environmental friendliness.

Applications: public buildings, hospitals, cinemas, schools, hotels, offices, banks, dept. stores & airports.

Thickness: 3.5mm.

Tile Size: 500mm x 500mm, 610mm x 610mm, 1000mm x 1000mm.





PRIASELF CONFORT HAMMER offers the same design as Prialpas Confort Hammer, but is supplied in a 5mm format with a special backing to allow for fixing with a tackifier adhesive.

Full bonding is not necessary.


Thickness: 5mm.

Tile size: 500mm x 500mm, 610mm x 610mm.

Manufactured to order, subject to minimum order quantities.

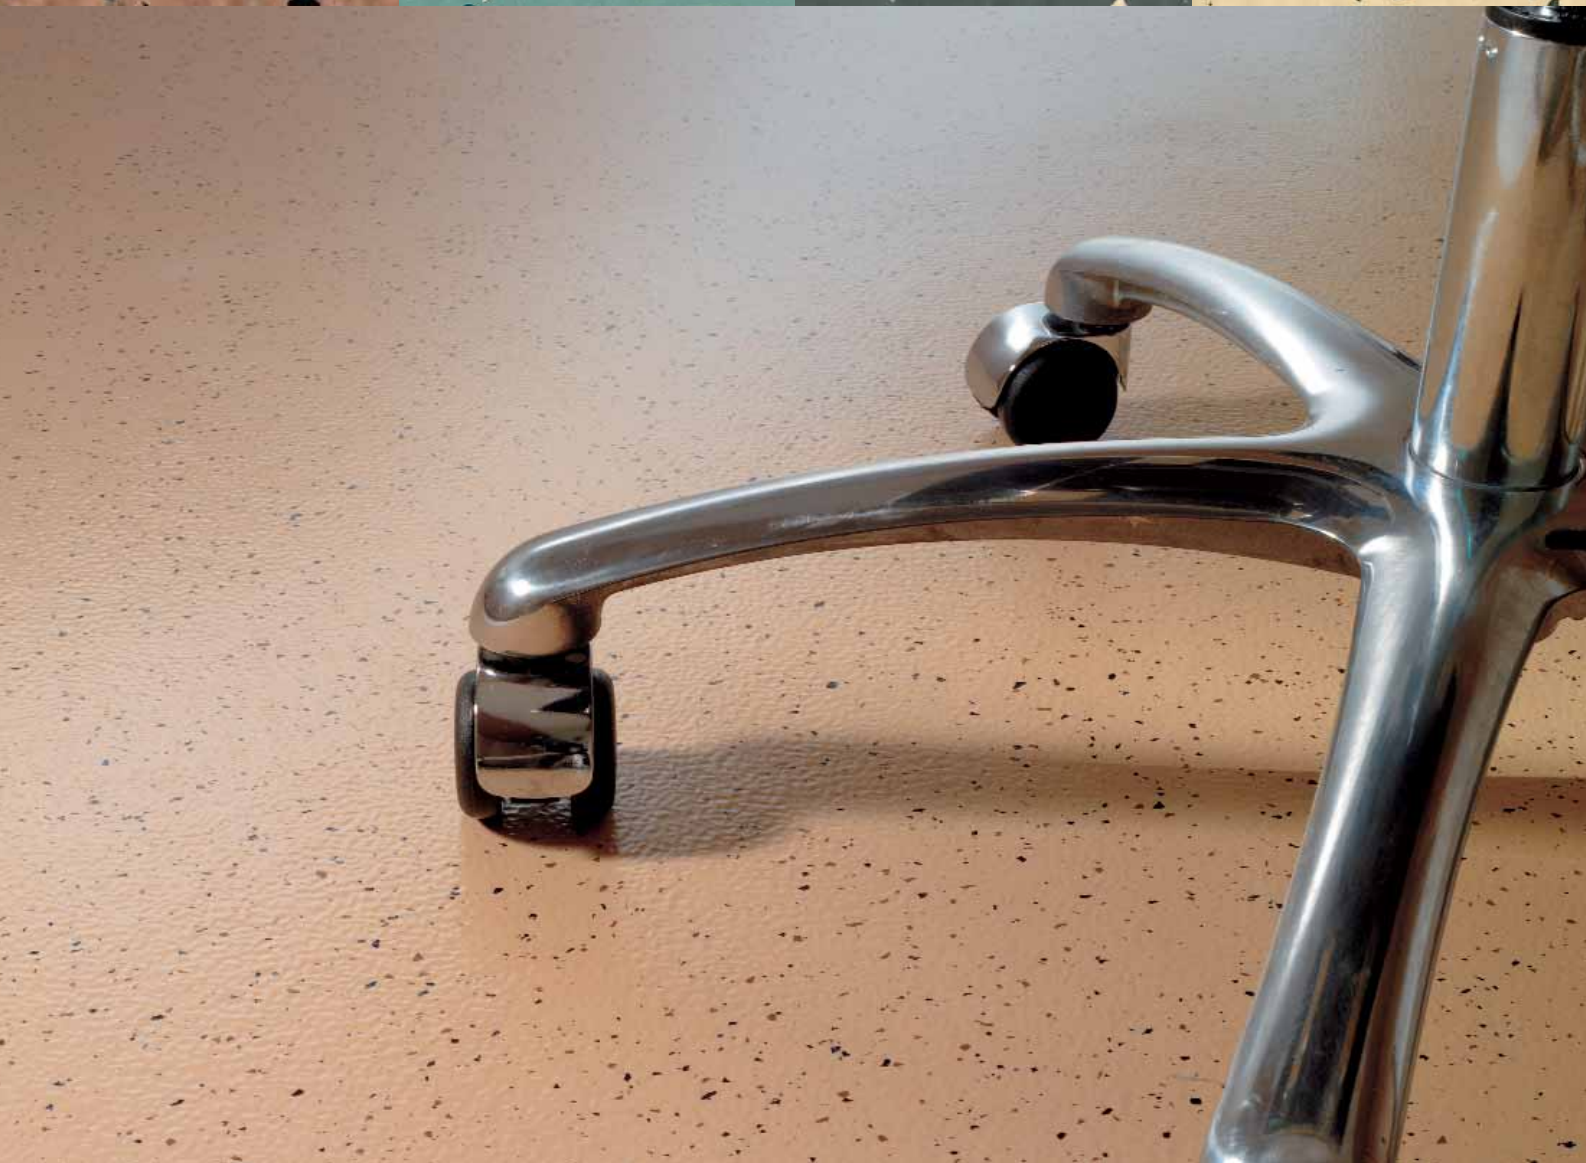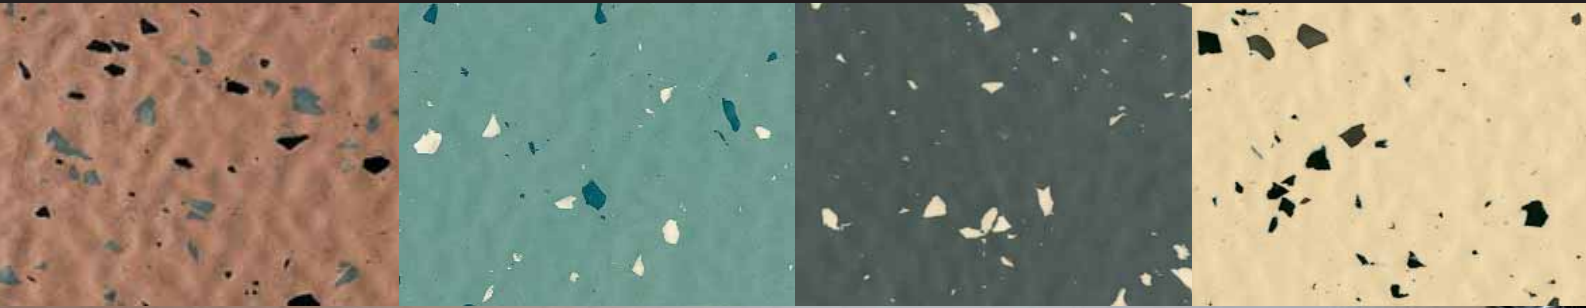

PRIALPAS AND PRIASELF CONFORT HAMMER GRAIN

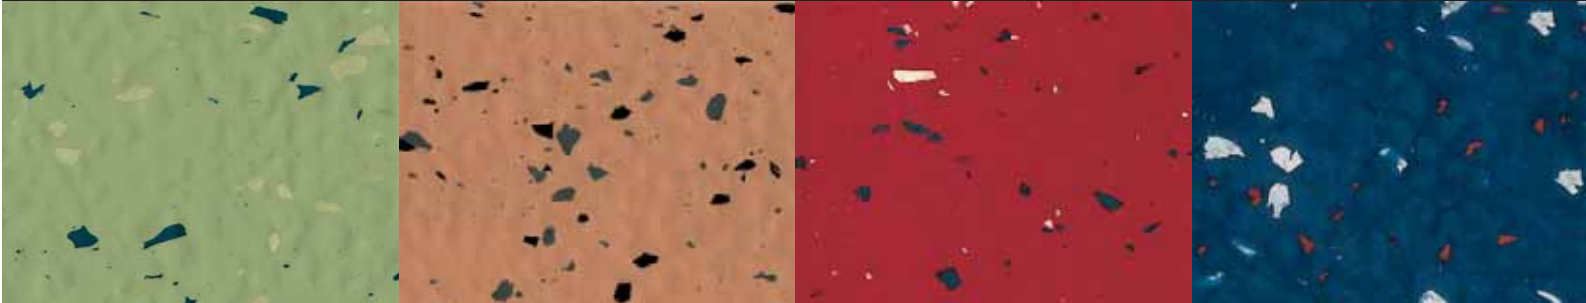


CONFORT HAMMER GRAIN Confort Hammer Grain is a hammerblow surface rubber safety flooring tile with terrazzo granule effect. Slip resistant, extremely hardwearing, sound deadening, easy and economical to clean, cigarette burn resistant, excellent rolling traffic capability and environmentally friendly, Confort Hammer Grain is ideally suited for an extensive variety of extra heavy contract applications.

Applications: public buildings, hospitals, cinemas, schools, hotels, offices, banks, dept. stores & airports etc.

Thickness: 3.5mm.

Tile size: 500mm x 500mm, 610mm x 610mm, 1000mm x 1000mm.


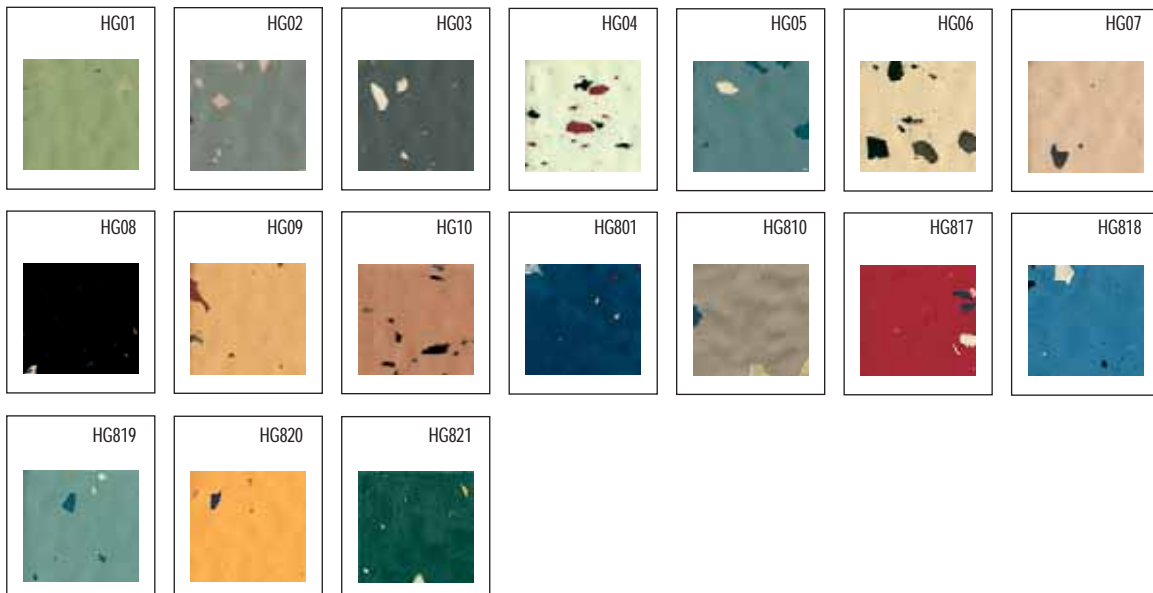


PRIASELF CONFORT HAMMER GRAIN offers the same design as Prialpas Confort Hammer, but is supplied in a 5mm format with a special backing to allow for fixing with a tackifier adhesive. Full bonding is not necessary.

Thickness: 5mm.

Tile size: 500mm x 500mm, 610mm x 610mm.

Manufactured to order, subject to minimum order quantities.

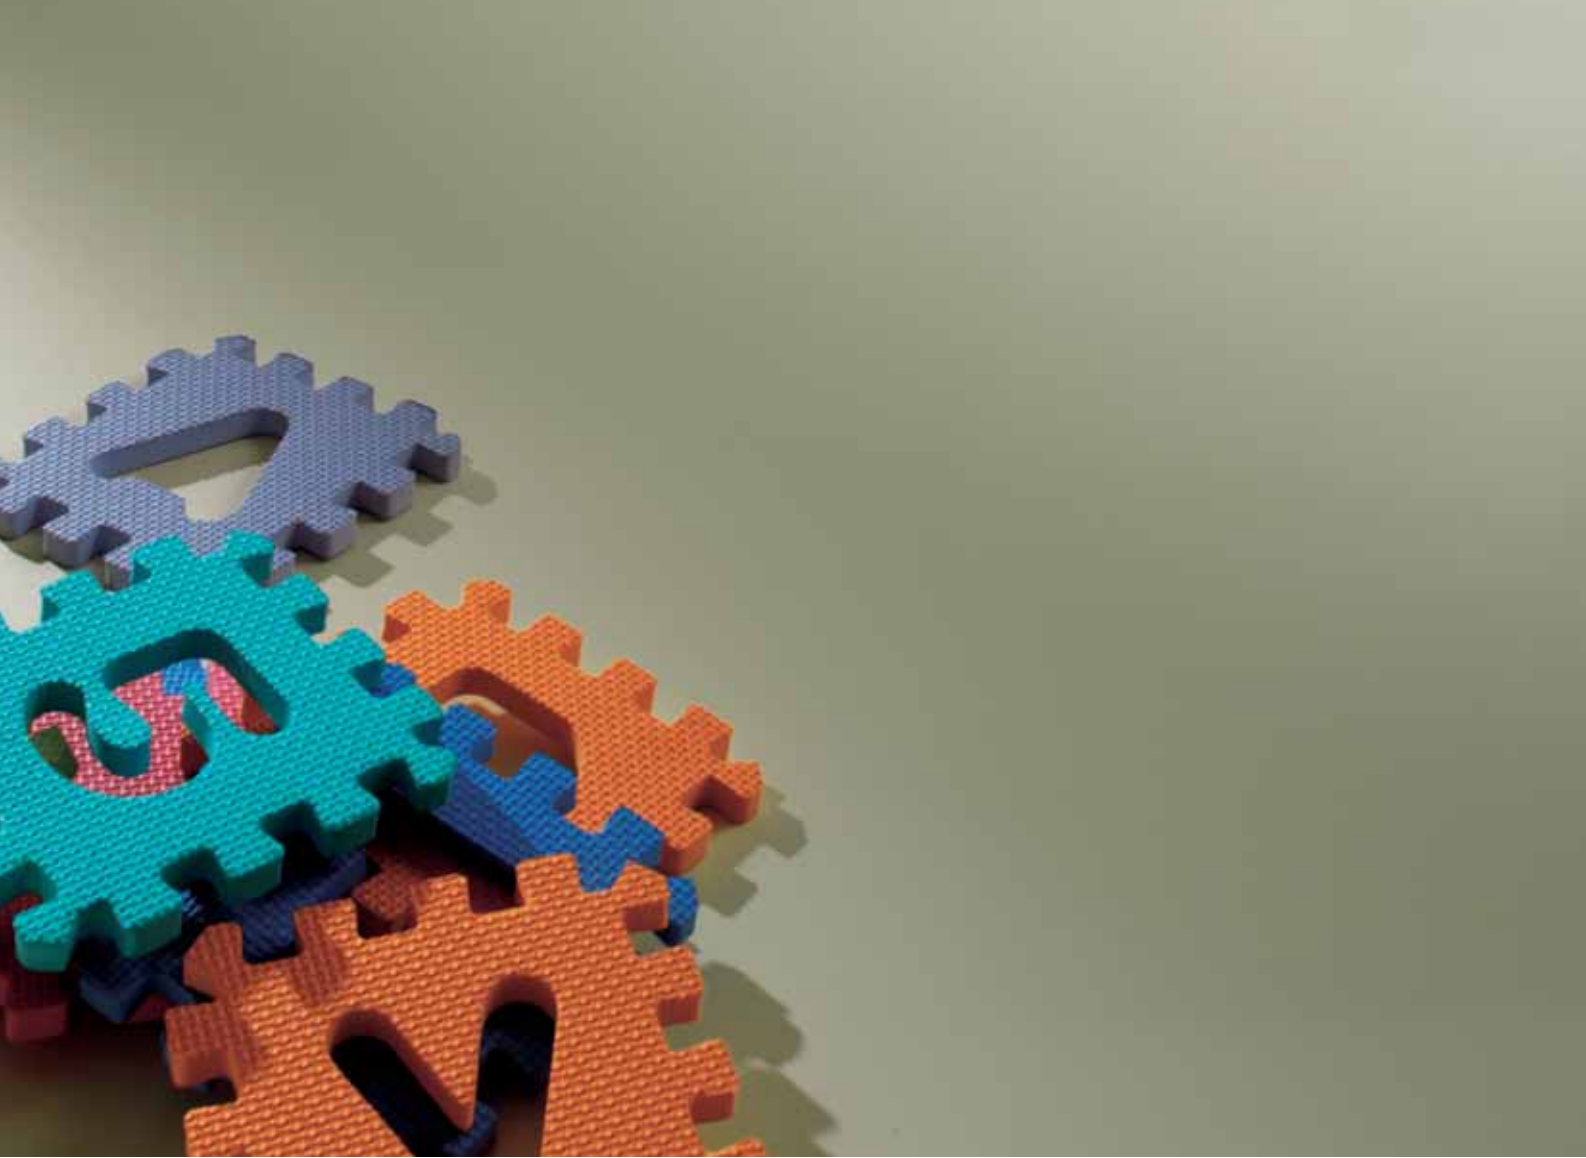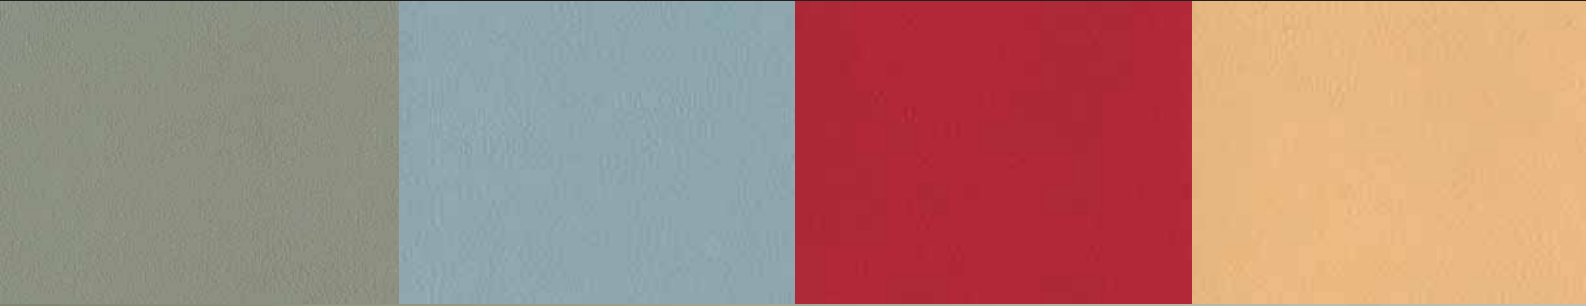

PRIALPAS MICROPOINT UNI




MICROPOINT UNI is a high performance, one coloured rubber flooring, particularly appreciated by interior designers, specifiers and creative users due to its excellent colour range. Comfortable, secure and sound deadening underfoot, cigarette burn resistant, flame resistant, hardwearing, environmentally friendly and incredibly inexpensive, Micropoint Uni is an ideal choice for a wide variety of contract and residential applications.

Applications: Public buildings, hospitals, cinemas, schools, hotels, offices, etc.

Thickness: 2.0mm.

Tile size: 610mm x 610mm. Roll Size 12m x 1.2m.

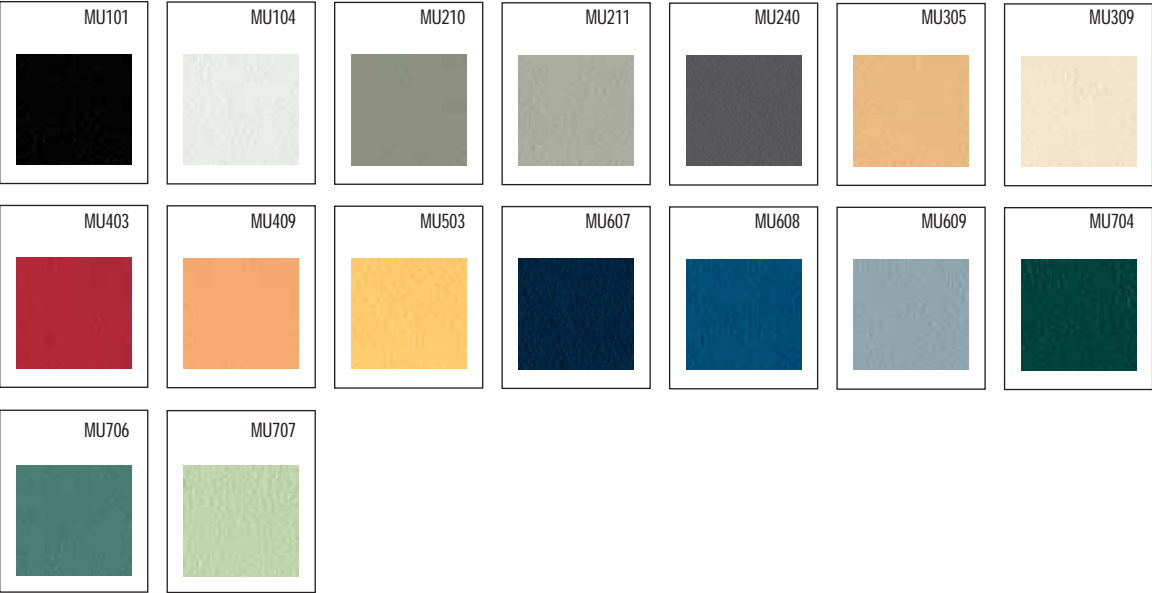

Manufactured to order, subject to minimum order quantities.



2mm

PRIALPAS MICROPOINT




MICROPOINT is a very attractive, slip resistant multi-coloured terrazzo effect smooth leathergrain textured, rubber flooring. Easy and economical to clean, hardwearing, footfall noise deadening, flame resistant, cigarette burn resistant, comfortable and secure underfoot, environmentally friendly and incredibly inexpensive. The 610mm tiles are suitable for raised access flooring installations.


Applications: Public buildings, hospitals, cinemas, schools, hotels, offices, etc.

Thickness: 2.0mm.


Tile size: 610mm x 610mm. Roll size: 12m x 1.2m.

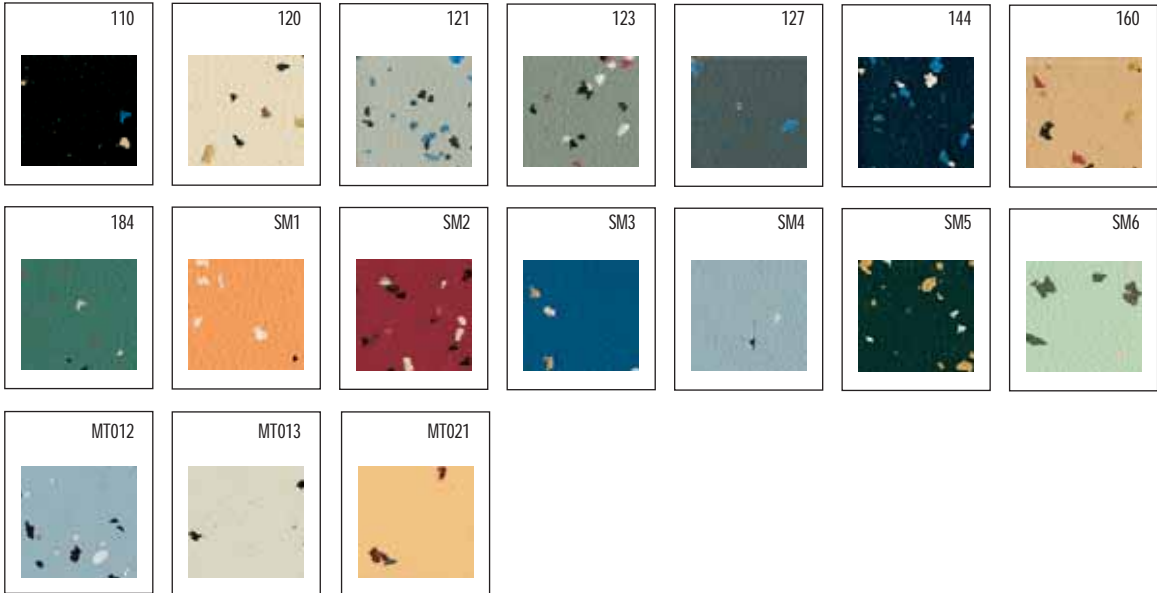

Manufactured to order, subject to minimum order quantities.

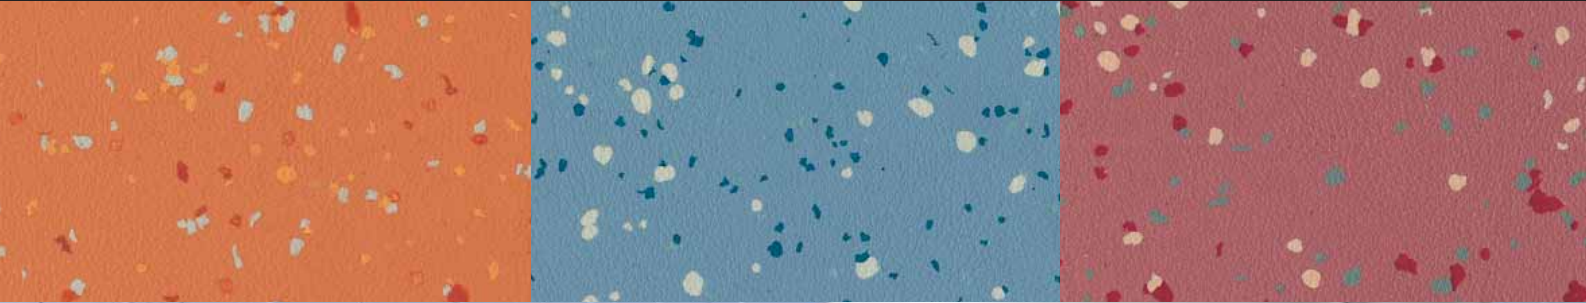

PRIALPAS MICROPOINT PLUS

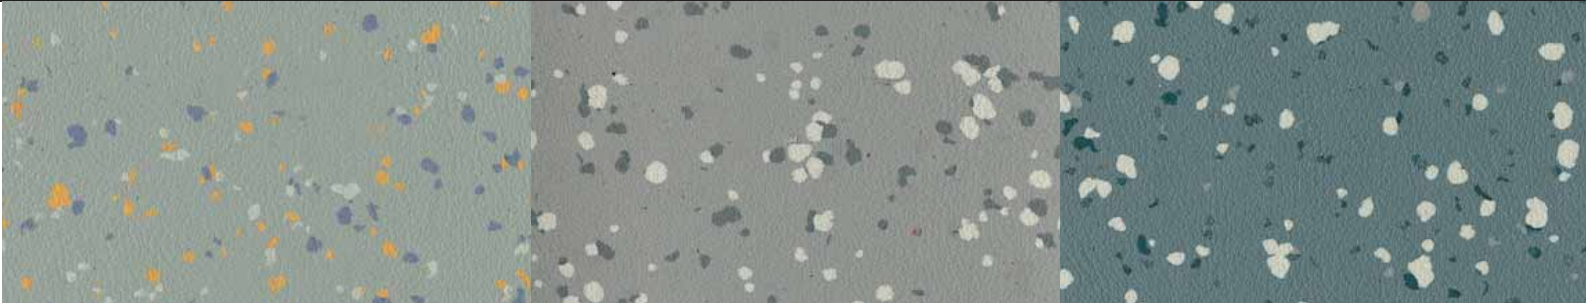


MICROPOINT PLUS is a superb new, sophisticated, multi-pastel coloured flecked terrazzo effect rubber flooring. Micropoint Plus possesses all the necessary qualities for a multitude of contract and residential applications. Hardwearing, flame resistant, cigarette burn resistant, fabulously comfortable and safe underfoot, easy to clean and environmentally friendly. The 610mm x 610mm tiles are suitable for access flooring installations.

Applications: Public buildings, hospitals, cinemas, schools, hotels, offices, etc.
banks, dept. stores and airports.


Thickness: 2.0mm.

Tile size: 610mm x 610mm **Roll size:** 12m x 1.2m.

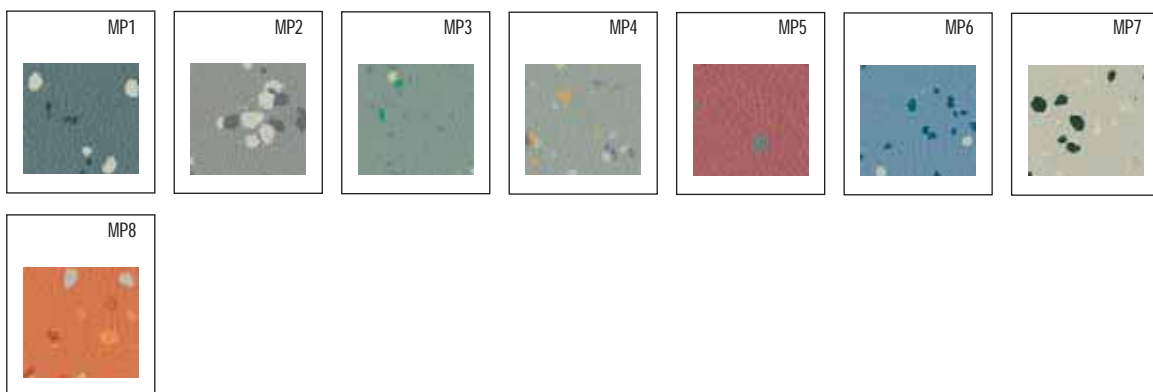


Manufactured to order, subject to minimum order quantities.

PRIALPAS TENAX ARDESIA, SYSTEM Q30 & TENAX A20 AC

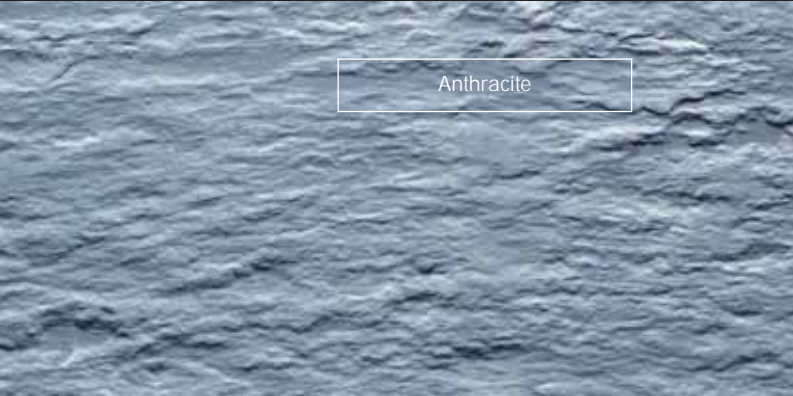

Anthracite

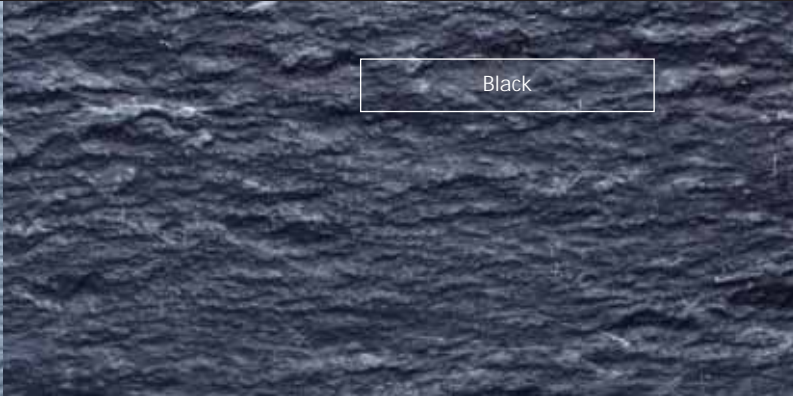

Black



System Q30 - Black



Tenax A20 AC - Black

TENAX ARDESIA Super quality slate finish synthetic rubber safety flooring tiles. Ardesia offers specifiers and users a high specification yet remarkably inexpensive synthetic rubber flooring with superior simulated slate safety surfacing. Ardesia is recommended for heavy contract flooring use. Its textured slate surfacing does not just have a visually real appearance, it also offers excellent anti-slip underfoot traction, ease of maintenance, cigarette burn resistance, flame resistance, exceptional sound deadening properties, extreme durability, electrical resistance and very importantly, safe passage for wheelchairs, trolleys, walking sticks etc.

Applications: Public buildings, hospitals, cinemas, schools, hotels, offices, banks, dept stores & airports etc.

Thickness: 3mm.

Tile size: 1000mm x 1000mm.

Colour: Black and Anthracite Stocked.



Other colours (as per Central range) are available for a minimum 150m² order.

SYSTEM Q30 is an exceptionally inexpensive and decorative high specification square studded rubber safety flooring tile with excellent dimensional stability, ease of cleaning, heavy contract durability, cigarette burn resistance, flame resistance, electrical resistance and sound deadening properties.

Applications: Public buildings, hospitals, cinemas, schools, hotels, offices, banks, dept stores and airports etc.

Thickness: 2.5mm or 4mm

Tile Size: 500mm x 500mm. **Stud size** 32mm x 32mm.

Colour: Black Stocked in 2.5mm thickness.



Other colours (as per Central range) are available for a minimum 150m² order.

PRIALPAS TENAX A20 AC Super heavy round studded flooring tiles. Designed for maximum traffic locations e.g. railway and underground stations, fork lift truck areas, ice skating rink surrounds. Flooring doesn't get much tougher than this. As with the entire Tenax range the flooring offers noiseless walking comfort, slip resistance, cigarette burn resistance, remarkable abrasion resistance and incredible value for money. Special "dovetail" underside for cement method installation.

Applications: Railway and underground stations, fork lift truck areas, ice skating rink surrounds etc.


Thickness: 10mm

Tile Size: 1000mm x 1000mm. **Stud diameter** 20mm. **Stud height** 1.7mm.

Colour: Black only stocked.



Colours Red(R50) & Grey(N11) usually subject to a 300m² minimum order.

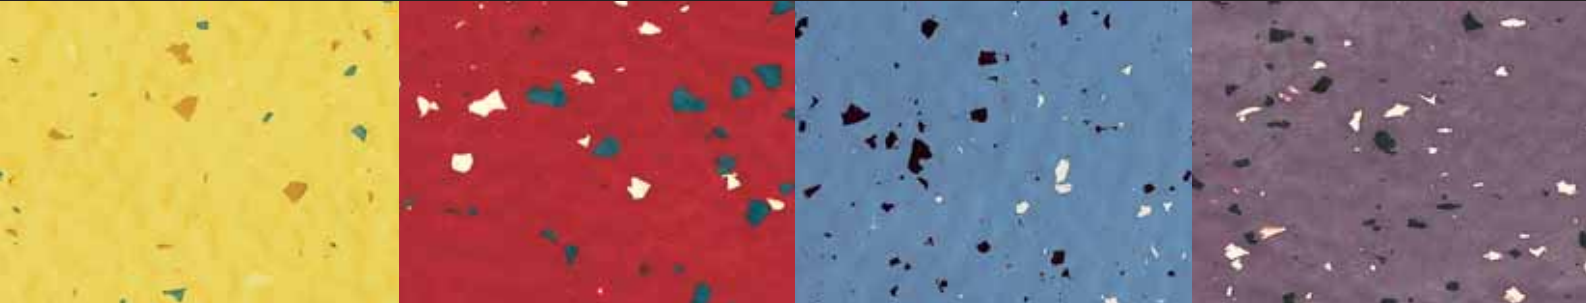




PRIASPORT ARENA H.G




PRIASPORT ARENA H.G is a proven specialist extra heavy-duty flooring for problem sports areas. Priasport Arena H.G has a hammerblow finish with inset terrazzo chippings, and is resistant to golf spikes, ice skate blades, cricket and athletic spikes, football, rugby and hockey studs and can reduce impact in weight rooms. Supplied in tile format, with peduncle backing for polyurethane or epoxy adhesive bonding.

Thickness: 9.5mm.

Tile size: 1000mm x 1000mm.

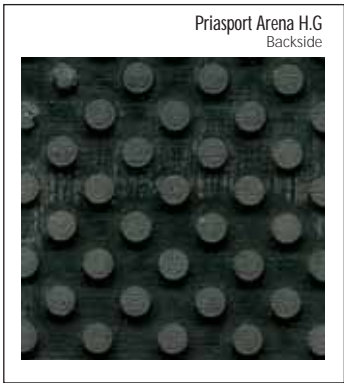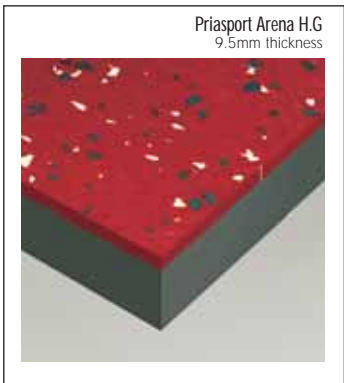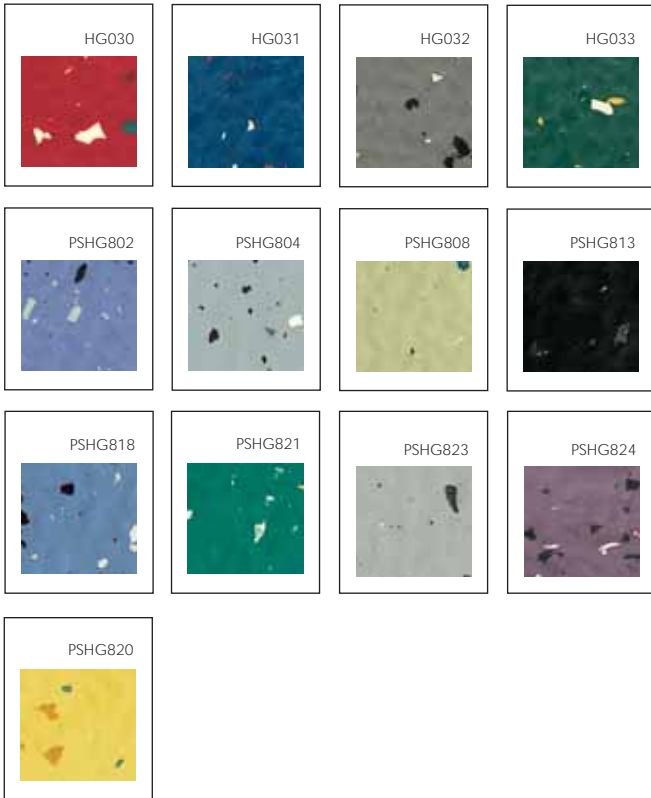

PRIASPORT R AND DD

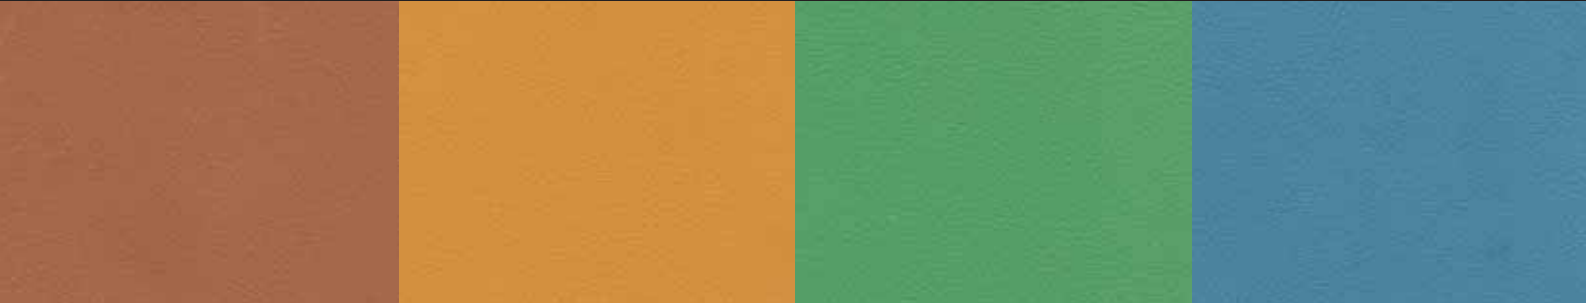

Rubber is the elastics material par excellence. Nowhere is this such an important technological advantage so evident as in school or professional gymnasiums. From athletics to badminton, from volleyball to body-building, from hockey to fitness, from basketball to indoor soccer: Prialpas rubber flooring is the best solution for many requirements. PRIASPORT R (homogeneous) and PRIASPORT DD (double layer) are rubber sports flooring for interior use made of natural and synthetic rubber, calendered and vulcanised, with opaque, smooth, anti-slip surfaces. PRIASPORT DD has a 2mm surface wear layer vulcanised to a softer and more elastic supporting base layer that gives excellent acoustic absorption and elastic response, absorbing shock and helping the ball to bounce perfectly. This product gives the ideal elastic return to thrusts , offering security to all players including persons suffering from the onset of micro-traumas caused by prolonged sports activities.

Priasport flooring joints do not necessarily have to be sealed. Matching seal beads, however, are available.

PRIASPORT R




Thickness: 3.0mm. Roll Size: 12.0m x 1.22m.

PRIASPORT DD



Thickness: 4.0mm, 6.0mm and 8.0mm. Roll Size: 12.0m x 1.22m.

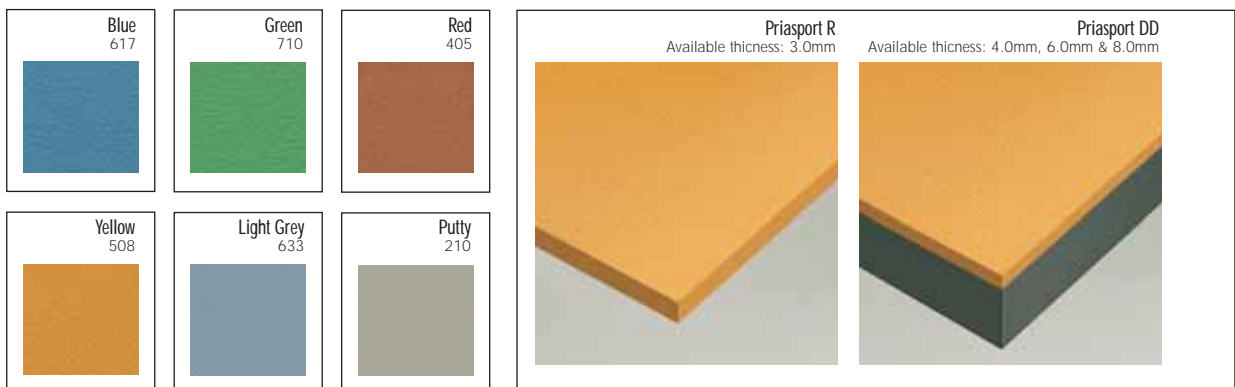

PRIALAM, PRIALAY & PRIALASTIC UNDERLAYS





PRIALAM underlayment is a stabilising, waterproofing, damp resisting and insulating fibreglass sheet that acts as an isolating membrane. Prialam is constructed by heating fibreglass with synthetic resins and elastomers on both sides, and has a series of expanded resin peduncles on the underside. Prialam can be bonded, or (more usually) loose-laid on the substrate, rolls simply butted side by side, and then overlaid with Priasport R or Priasport DD using a two part, polyurethane adhesive. Prialam reduces installation times, and allows the sports flooring to be laid without waiting for the substrate to dry.

Roll size: 50m x 1.83m.

PRIALAY & PRIALASTIC absorbing underlayments reduce muscle fatigue experienced by athletes, soften blows by falls, limit the risk of micro-traumas and improve ball bounce. Prialay and Prialastic also improve the thermal and acoustic insulation properties of the gymnasium. When bonded to Priasport, the flooring can meet the high demands of competition surfacing. Prialay is the preferred choice whenever stringent compliance with international performance standards on shock absorption, peak loads and uniform loads is a necessity.

Prialay roll size: 20m x 1.50m.

Prialastic roll size: 12m x 1.22m.

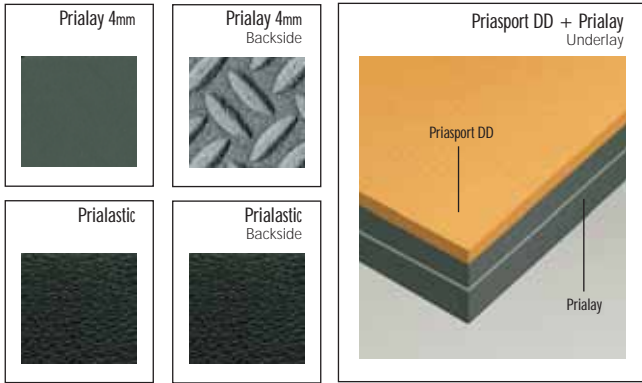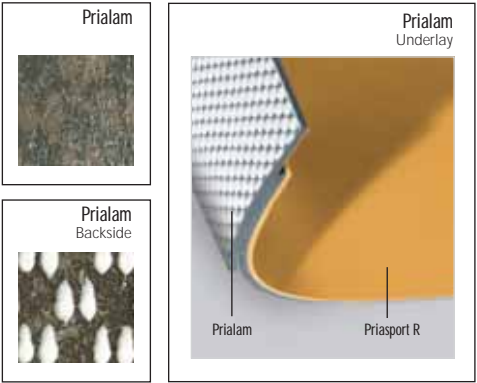

CLEANING AND CARE

Regular cleaning and care of all rubber and vinyl floorings is important to retain the appearance and prolong the performance of the material.

Jaymart supply a range of floor dressings and cleaners to be used with the majority of their rubber and vinyl ranges.



NOVA LONG-LIFE

Solids rich floor dressing, for application as soon as possible after installation of the floor-covering. Nova Long-Life creates a high shine but does not detract from the slip-resistant properties of the floor-coverings.

NOVACARE

Floor maintainer, for daily and weekly cleaning.

NOVA STARBRITE

Floor dressing remover.
To remove Nova Long-Life prior to re-dressing.

Full cleaning and care guidelines are available for each product on application.

TECHNICAL CHARACTERISTICS Priasport HG and Priasport

| | STANDARDS | REQUIREMENTS | PRIASPORT HG | PRIASPORT 3,4,6,8 mm |
|--|--|---------------|---|---------------------------------------|
| Hardness | ISO 7619 (SHORE A3) | ≥ 75 Shore | | 90 ± 5 Shore |
| Abrasion resistance (gr) | UNE 41958 IN | ≤ 3 gr | | 0.6 gr |
| Colour fastness to artificial light | EN 20105-B02 Procedure 3 | ≥ 6 | | ≥ 6 |
| Standard vertical deformation (mm) | UNE 41958 IN | ≤ 3mm | | 0.7mm (Priasport DD 4mm + Prialay) |
| Electrical resistance | EN 1081 (Ohm) | | | ≥ 10 ⁹ |
| Resistance to chemical Agents | EN 423 | | | No appreciable change |
| Residual indentation | UNE 41958 IN (mm) | ≤ 0.5mm | | 0.16mm |
| Effect of cigarette burns on surface | EN 1399 | | | Light Spot |
| Resistance to impact (8 Nm) Tread | UNE 41958 IN | ≤ 0.5mm | | 0.2mm |
| Resistance to tread charge (1000N) - Tread | UNE 41958 IN | ≤ 0.5mm | | 0.2mm |
| Ball rebound | DIN 18032/2 UNE 41958 IN | ≥ 90% | | 97% (Priasport DD 4mm + Prialay) |
| Slipping Resistance | UNE 41958 IN | 0.4 ≤ μ ≤ 0.8 | | 0.8 |
| Fire Resistance | CSE RF3/ 77 RF2/75A DIN 4102 | | | Classe 1 B1 |
| Shock absorption | DIN 18032/2 UNE 41958 IN | | | ≥ 16% (Priasport DD 4mm + Prialay) |
| Resistance to ozone | ASTM D 1149 | | Visual inspection under xX Magnification indicated no Cracks or surface crazing | |
| Hardness | ASTM D 2240 (SHORE A) | | 81 (after 1 sec.) | |
| Water Absorption | ASTM D 570 (%) | | 0.13 | |
| Tensile Strength | ASTM D 412 (psi) | | 868 | |
| Ultimate elongation | ASTM D 412 (%) | | 347 | |
| Modulus 20% | ASTM D 412 (%) | | 175 | |
| Taber abrasion | ASTM C 501 (INDEX) | | 126 (H22 WHEELS; 1KG LOAD) | |
| Tear Resistance | ASTM D 624 (lbf/in) | | 161 | |
| Dimensional Stability | ASTM D 1204 (%) | | + 0.02 | |
| Fire Resistance | CSE RF3/ 77 RF2/75A DIN 4102 (D.M. of 26/06/84) | | Classe 1 B1 | |
| Specific optical density of smoke | ASTM E 662 | | 411 no flaming 474 (non flaming) | |
| Critical radiant flux | ASTM E 648 (W/cm ²) ASTM E 648 (class NFPA 101) | | 0.49 1 | |
| Compression set | ASTM D 395 (%) | | 48.20% | |
| Coefficient of Friction | ASTM D 1894 | | 0.83 (static) 0.84 (kinetic) | |

Prialpas flooring is free of PVC, cadmium, formaldehyde, asbestos and toxic halogen substances in case of fire (such as chlorine, fluorine, bromine and iodine). They are not easily inflammable and meet class B1 standards in accordance with DIN 4102, part 1 or equivalent international standards. The gases generated in case of fire are classified, in accordance with DIN 4102, as toxicologically harmless.

PRIALPAS TECHNICAL DATA

| | STANDARDS | REQUIREMENTS | CENTRAL 2.6M | CENTRAL 4.0M | ARDEISA | Q30 |
|--|---|--|---|--|--|--|
| Dimensional Stability 6h/80°C | EN 434 (% MAX) | ≤ 0.4% | ≤ 0.3% | ≤ 0.3% | ≤ 0.3% | ≤ 0.3% |
| Effect of cigarette burns on surface | EN 1399 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 |
| Hardness | ISO 7619 (Shore A) | ≥ 75 | 85 ± 5 | 85 ± 5 | 85 ± 5 | 85 ± 5 |
| Indentation | EN 433 (mm) | ≤ 0.25 | 0.20mm | 0.15mm | 0.15mm | 0.20mm |
| Abrasion (load 0.5 KG) | ISO 4649 Method A5N | ≤ 250 | 140mm ³ | 140mm ³ | 140mm ³ | 140mm ³ |
| Colour fastness to artificial light | EN 20105 – B02 Procedure 3 | On the Blue Scale ≥ 6 On the Grey Scale ≥ 3 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 |
| Flexibility (mandrel diameter 20mm) | EN 435 Method A | No Fissuring | No Fissuring | No Fissuring | No Fissuring | No Fissuring |
| Effect of castor chairs | EN 425 | ----- | Suitable if castor wheels type W are used | | | ----- |
| Fire Resistance | D.M del 26/06/84 CSE RF3/77 RF2/75A DIN 4102 | ----- | Classe 1 B1 | Classe 1 B1 | Classe 1 B1 | Classe 1 B1 |
| Toxicity of combustion gases | DIN 53436 | ----- | Negligible | Negligible | Negligible | Negligible |
| Slip Resistance | DIN 51130 (Class) | ----- | R9 | R9 | R9 | R9 |
| Acoustic Insulation | DIN 5210 ISO 140-8 (dB) | ----- | 8dB | 13dB | 9dB | 7dB |
| Thermal Resistance | DIN 52612 (W/mK) | ----- | 0.35 | 0.35 | 0.35 | 0.35 |
| Electrical Resistance | EN 1081 (Ohm) | ----- | ≥ 10 ⁹ | ≥ 10 ⁹ | ≥ 10 ⁹ | ≥ 10 ⁹ |
| Resistance to chemical agents | EN 423 | ----- | No appreciable change | ----- | ----- | ----- |
| Electrostatic charge when walked upon | EN 1815 (Kv) | ----- | ≤ 2Kv Antistatic | ----- | ----- | ----- |

| HAMMER | HAMMER GRAIN | PRIASELF | TOPLINE CARAT EL | MICRO POINT | MICRO POINT PLUS | CONFORT |
|--|--|--|--|--|--|--|
| ≤ 0.3% | ≤ 0.3% | ≤ 0.3% | ≤ 0.3% | ≤ 0.3% | ≤ 0.3% | ≤ 0.3% |
| Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 | Method A ≥ Level 4 Method B ≥ Level 3 |
| 85±5 | 85±5 | 85±5 | 90±5 | 90±5 | 90±5 | 85±5 |
| 0.15mm | 0.15mm | 0.15mm | 0.08mm | 0.08mm | 0.08mm | 0.20mm |
| 140mm ³ | 150mm ³ | 150mm ³ | 160mm ³ | 160mm ³ | 160mm ³ | 140mm ³ |
| ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 |
| No Fissuring | No Fissuring | No Fissuring | No Fissuring | No Fissuring | No Fissuring | No Fissuring |
| | | | | | | |
| Classe 1 B1 | Classe 1 B1 | Classe 1 B1 | Classe 1 B1 | Classe 1 B1 | Classe 1 B1 | Classe 1 B1 |
| Negligible | Negligible | Negligible | Negligible | Negligible | Negligible | Negligible |
| R9 | R9 | R9 | R9 | R9 | R9 | R9 |
| 11dB | 11dB | 16dB | 6dB | 6dB | 6dB | 7dB |
| 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 |
| ≥ 10 ⁹ | ≥ 10 ⁹ | ≥ 10 ⁹ | ≥ 10 ⁹ | ≥ 10 ⁹ | ≥ 10 ⁹ | ≥ 10 ⁹ |
| | | | | | | |
| | | | | | | |
| | | | | | | |

TERMS & CONDITIONS

All quotations and contracts are subject to the following conditions unless otherwise stated subsequently by us in writing, and no qualification of these conditions in the customer order or acceptance shall be deemed to form part of this contract.

1. **Delivery:** Any items as to rate or time of DELIVERY are not to be deemed to be the essence of the contract and no guarantee can be given or implied thereto. We, however, will make every reasonable effort to ensure delivery in accordance with requirements so far as circumstances permit.
2. All orders are subject to our final acceptance at Westbury and thus the contract of sale is explicitly agreed to have been made at Westbury, Wiltshire. English Law shall apply and any dispute shall be settled in the English Courts.
3. ALL PRICES are quoted without engagement and, unless otherwise expressly stated by us in writing, subject to alteration without notice.
4. **DESPATCH OF ORDERS:** All goods are sent by the most convenient method available to us at the time of despatch unless otherwise specified. ANY GOODS FOR DELIVERY TO ADDRESSES OTHER THAN THOSE OF THE PURCHASER are only sent at the PURCHASER'S RISK.
5. **CARRIAGE:** Please see our current pricelist for carriage terms
6. **DELIVERY TO SITE:** THE PURCHASER WILL BE RESPONSIBLE FOR OFF-LOADING the goods and in accordance with normal transport practices such goods will be delivered to the goods inwards department or reception on the ground floor.
7. **SELECTION OF GOODS:** Is a matter solely for the purchaser, who should ascertain in advance of ordering, the suitability and colour, etc. of goods for the purpose required. Technical details and samples are available on request.
8. **TECHNICAL DESCRIPTION AND DATA.** Such descriptions whilst given as a guide in good faith are subject to alteration by the seller without notice. In particular all dimensions are approximate only.
9. **LIABILITY:** We will not be liable for any indirect or consequential loss whatsoever arising from, or in conjunction with, the supply of defective goods, delay in delivery, non-delivery, loss or damage to goods in transit or to the property of the purchaser, or any third person howsoever caused. If goods have been exported, customers are welcome to return the goods to our premises in Westbury where a decision can be made regarding any action to be taken.
10. **CLAIMS:** No claim for ANY DEFECT in goods supplied will be accepted unless made in WRITING within 3 days from the date of delivery. Goods returned to us within 10 days from receipt in exactly the same condition in which they were received, will be credited only if we also judge them to be defective, but will not form the subject of any claim for labour cost or other loss of any kind. No claim for loss or damage in transit will be accepted unless signed for as such and confirmed in writing and verbally within 10 days from the date of despatch. A clear signature to the carriers for goods concerned will indicate to the carriers and to us that they were received in perfect condition.
11. **DEFECTIVE GOODS:** Under no circumstances whatsoever will we accept return of goods for credit when they have already been installed, used or laid. Defects should be observed on receipt, i.e. prior to installation, use or laying, and be notified to us immediately, both verbally and in writing, so that we can decide what action may be taken. In the case of goods to be exported, inspection should be made prior to shipment.
12. **COLOURED GOODS:** JAYMART floorings and accessories are produced by highly sophisticated and modern manufacturing methods. However, due to differing production batches and or varying individual product manufacturing processes, colour and shading variations can occur and must be accepted.
13. **COLOUR SAMPLES:** The small hand feeler samples given or sent to enquirers are an indication of colour only . They are not necessarily representative of the actual product colour shade to be supplied
14. **PRODUCT CHANGES:** The policy of the Company is one of increasing improvement and development, so we reserve the right to add or delete from the range or to change products without notice
15. **TITLE TO GOODS:** We reserve the right to retain, if we should so decide, the title to goods supplied under these terms of sale until the purchaser has discharged all sums owing to us. Until such discharge, the purchaser shall hold the goods, whether or not sold to another party upon trust for ourselves and grant us the right, if we so wish, to enter the purchaser's or its agent's premises to recover any such goods.
16. **CANCELLATIONS.** We will consider, but not be bound to accept, any request for cancellation of an order, and acceptance shall be on such terms as may be agreed by us in writing.
17. **RETURNS:** We do not normally accept return of perfect goods if correctly supplied as ordered. We therefore strongly recommend that customers check quantity, colour and product requirements carefully before ordering. If goods are accepted for return for whatever reason, we reserve the right to levy an administration charge together with carriage costs incurred for original despatch. No requests for return will be considered more than 3 months after invoice date.
18. **COLLECTIONS:** Our warehouse is usually open for collection from Monday to Friday (9 a.m. to 12.30 p.m. and 2 p.m. to 5.30 p.m.) excluding holidays. We kindly request customers, however, to give us reasonable advance warning of intended collection of goods required. We regret that we cannot accept any claims whatsoever in such cases, if goods are unavailable at the time of collection. All promises of stock availability are given in good faith, but should not be regarded as guaranteed correct.
19. **SETTLEMENT:** Approved credit account customers should make their payments by the end of the month following the date of invoice. Cleared funds are required from non-credit account customers before goods can be released. Prepayment may be made by cheque, postal order, cash, bank transfer/CHAPS or most major credit/debit cards.
20. **VAT:** Is chargeable extra at current rate on prices listed.

PLEASE NOTE: While every effort is made to ensure accurate representation of colours, variations may occur due to limitations in the printing process. We always recommend, and are happy to supply free-of-charge, hand-held samples for colour reference.

Jaymart

FOR FLAWLESS FLOORS

Jaymart



Aluminium entrance matting systems



Rubber and vinyl floor coverings



Multi purpose mats and matting



Anti-fatigue and duckboard matting



Natural carpeting and domestic mats



Entrance/foyer matting

FOR FURTHER INFORMATION, FREE COPIES OF ANY OF OUR OTHER BROCHURES
OR FREE SAMPLES PLEASE PHONE:

01373 864926

www.jaymart.co.uk

email: matting@jaymart.co.uk

Jaymart Rubber & Plastics Ltd., Woodlands Trading Estate, Eden Vale Road, Westbury, Wiltshire BA13 3QS Fax: 01373 858454